

POWER SUPPLY

T-SMB-300


RS 485 TO FO CONVERTER

TX RX TX RX

REVERSE BLOCKING DIODE BOX

STRING MONITORING BOX

Model No.: T-SMB-300
Serial No.: SMB/D/16/23/001

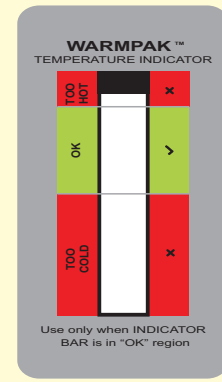




ESAB

SERVICE HELP LINE

(033) 2401 0358

1800 345 0358

(Toll Free)

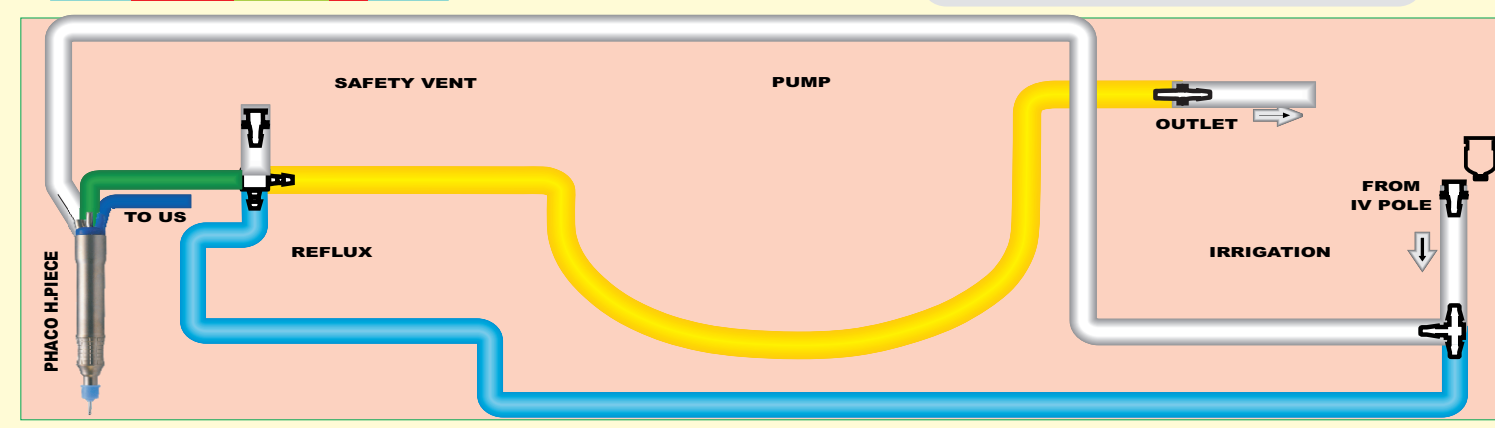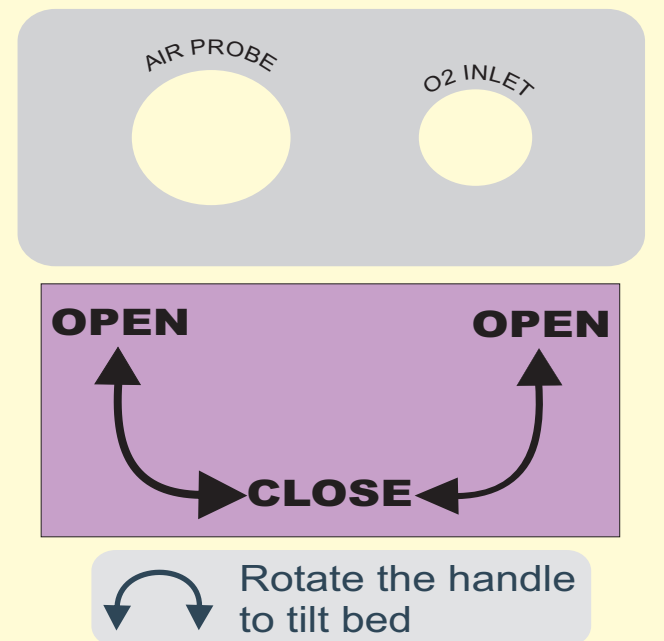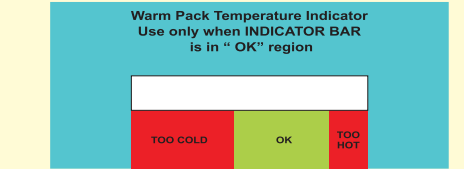

PVC STICKER

PROTEX RO **FANVPVTV** **Flow**
 Conforms to EN 730-1
 Max inlet Pressure : Oxygen 10 bar
MADE IN INDIA

PROTEX RA **FANVPVTV** **Flow**
 Conforms to EN 730-1
 Max inlet Pressure : Acetylene 1.5 bar Propane 3.0 bar
MADE IN INDIA

Warrior 400i CC/CV Ser. No. IEC 60974-1

3-Phase	16A/15V - 400A/34V	X	60%	100%
		I ₂	400A	310A
	U ₂	34.0V	29.5V	
3-Phase	16A/20V - 400A/36V	X	60%	100%
		I ₂	400A	310A
	U ₂	36.0V	32.4V	
3-Phase	U ₁	415V	I _{1 max} = 27A	I _{1 eff} = 21A
IP 23				

Art. No. 0465350788

PUG

MATERIAL THICKNESS m.m.	VERTICAL CUTTING							BEVAL CUTTING					
	3	6	12	18	25	50	75	3	6	12	18	25	50
NOZZLE SIZE	1	1	3	3	1	1	1	1	3	1	1	1	1
OXYGEN PRESSURE Kg/cm ²	2.1	2.1	2.5	2.5	2.8	3.5	5	1.8	2.1	2.8	3.2	3.5	4.9
ACETYLENE PRESSURE Kg/cm ²	0.15	0.15	0.15	0.15	0.15	0.15	0.2	0.15	0.15	0.15	0.15	0.15	0.15
SPEED SETTING	5-6	5	4-5	4	3-4	2	1-2	3-4	3	2-3	2-3	2	1-2

NOTE: THE FIGURES GIVEN ARE INTENDED AS A GUIDE AND MAY VARY ACCORDING TO LOCAL CONDITIONS e.g. FLAME SETTING CONDITION OF MATERIAL, EXPERIENCE OF OPERATOR ETC.

PVC STICKER

Inverter DC TIG / MMA Welding Machine

MODEL: TIG 400i				
IEC60974-1				
3-Phase	TIG	X	60%	100%
		I ₂	400A	310A
		U ₂	28.4V	22.4V
3-Phase	MMA	X	35%	100%
		I ₂	400A	305A
		U ₂	32.2V	29.6V
3-50/60Hz	U ₁ =415V	I _{1 max} =24A	I _{1 eff} =14A	
IP21S	H	I _{1 max} =18A	I _{1 eff} =14A	



NM 400 IS:7653
 Made in India

TECHNOMED ELECTRONICS
 Plot No. 41, Functional Industrial Estate,
 PERUNGUDI, CHENNAI - 600 096.
 SI.No. : _____





Scan QR Code for Service Request Form

ESAB

EQUIPMENT SERVICE SUPPORT

MODEL: MIG 300i Serial Number: V201.00101181.200307224

3-Phase	MIG/MMA	X	60%	100%
		I ₂	300A	240A
	U ₂	30.0V	26.4V	
3-50Hz	U ₁ =415V	I _{1 max} =22.9A	I _{1 eff} =16.2A	
IP21S	H			

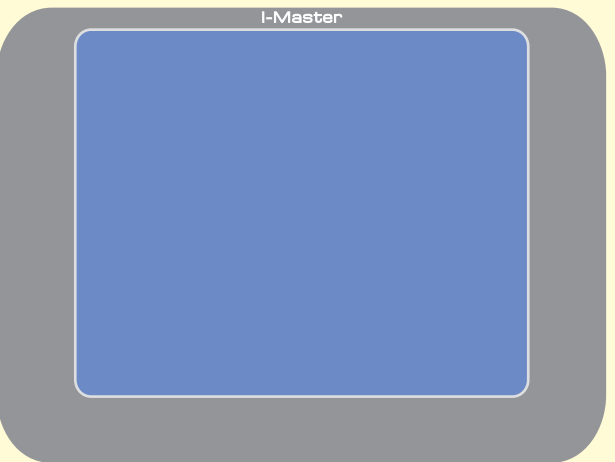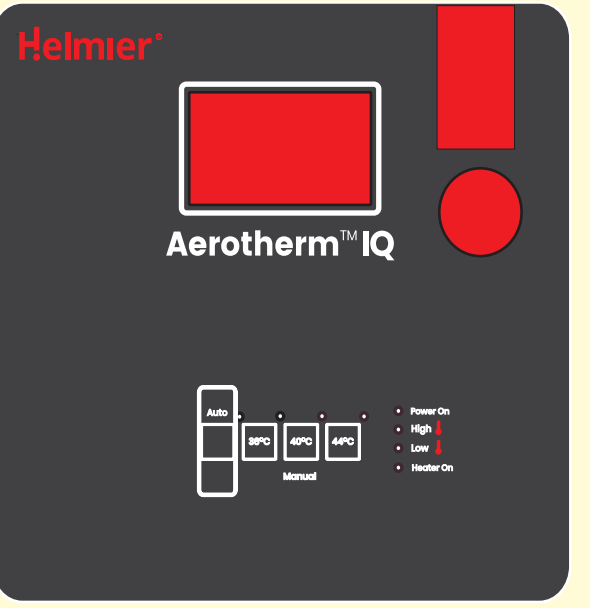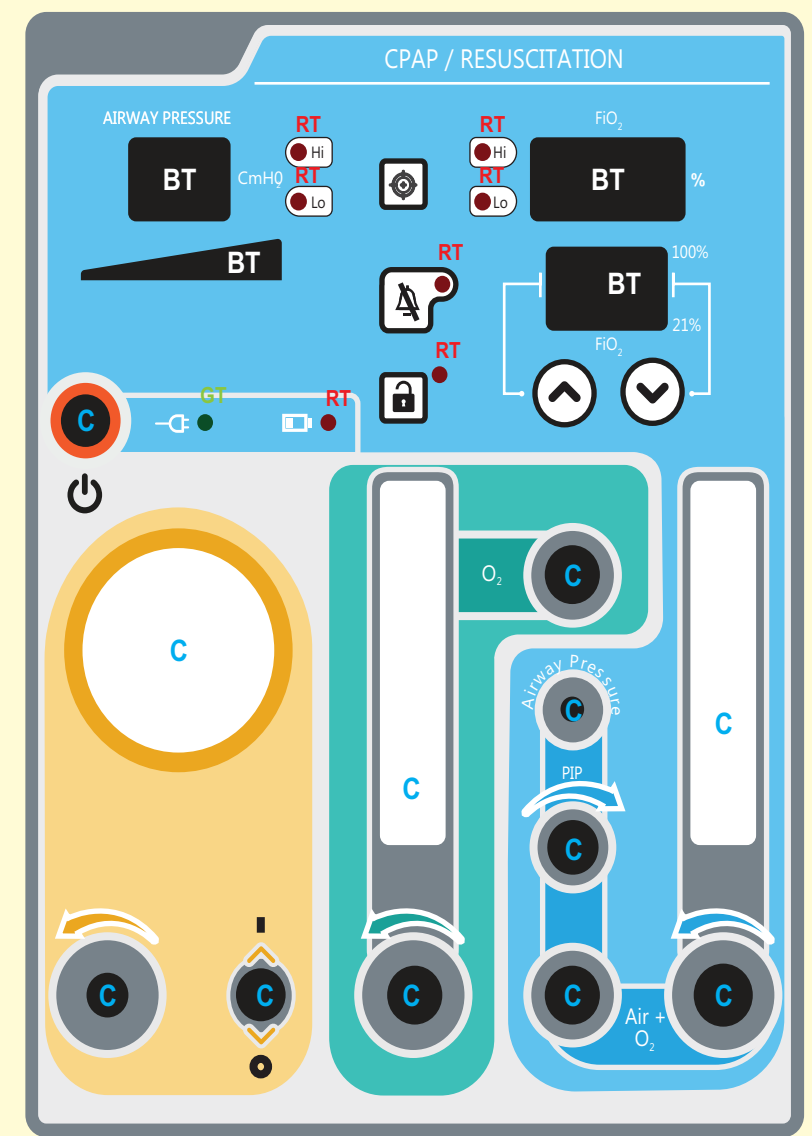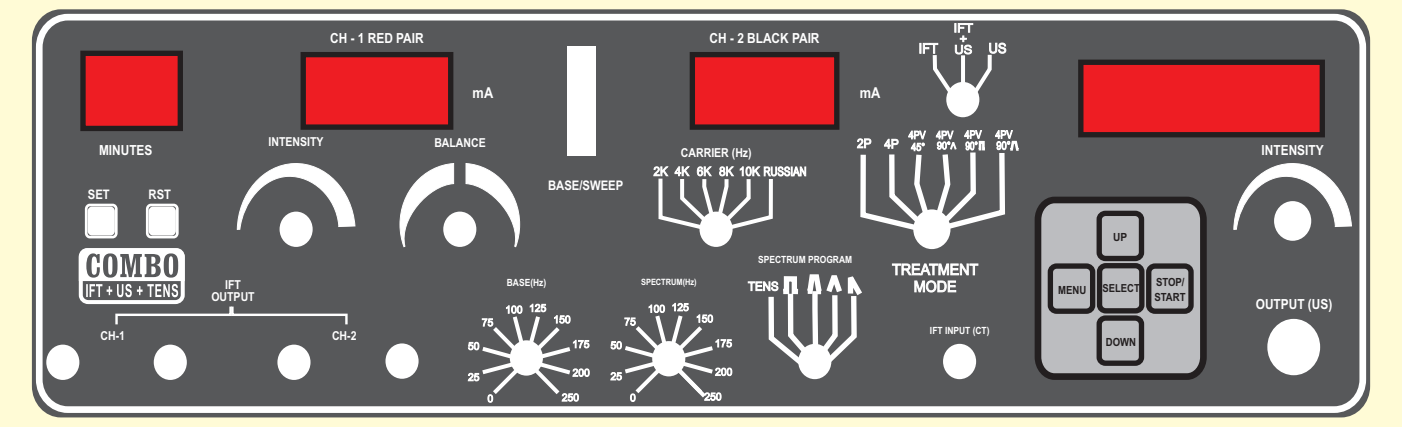

FRONT PANEL STICKER